



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200
Fax 613 632-5246



D412-664-203TRN
Job Sheet 194375



Part No: D412-664-203TRN

Job Qty: 1 pcs

Part Name: Crosstube Turning Detail



Part Weight: 0 lbs

Status: New

Priority: Medium

Job Created: 5/1/19

Job Tracking No:

Due Date: 6/7/19

Created By: Jennifer Renwick

Type: Stock

Description:

Note: D412-664-243 REV F IPP Rev:A 08-03-06 new issue DD verified by:eec IPP Rev B 08.04.02 Removed polish
EC verified by: DD

Ship Via:

Bill of Materials

Job Routing

Op No	Operation	Qty	Start Date	Due Date	Standard		Workcenter/Supplier		DAS Sign-off
					Setup Hrs	Run Hrs	Workcenter / Supplier	Lead Time	
100	Mori Seiki TL-40 - 1	1 pcs	6/7/19	6/7/19	3.21	1.33	Mori Seiki TL-40 - 1		662019-06-09 9-89
110	QC 2	1 pcs	6/7/19	6/7/19	0.00	0.00	QC 2 - 1		
							QC 2 - 12		
							QC 2 - 14		
							QC 2 - 17		
							QC 2 - 19		
							QC 2 - 2		
							QC 2 - 20		
							QC 2 - 22		
							QC 2 - 23		
							QC 2 - 25		
							QC 2 - 32		
							QC 2 - 33		
							QC 2 - 35		
							QC 2 - 39		
							QC 2 - 4		
							QC 2 - 40		
							QC 2 - 44		
							QC 2 - 45		
							QC 2 - 48		
							QC 2 - 49		
							QC 2 - 50		
							QC 2 - 51		
							QC 2 - 52		
							QC 2 - 57		
							QC 2 - 62		
							QC 2 - 63		
							QC 2 - 8		662019-06-09 9-89
							QC 2 - 66		
							QC 2 - 64		
							QC 2 - 65		
							QC 2 - 5		
							QC 2 - 71		662019-06-05 9-89
120	Mori Seiki TL-40 - 2 - B4B	1 pcs	6/7/19	6/7/19	0.00	1.67	Mori Seiki TL-40 - 1 - B4B		
130	QC 2	1 pcs	6/7/19	6/7/19	0.00	0.00	QC 2 - 1		
							QC 2 - 12		
							QC 2 - 14		
							QC 2 - 17		
							QC 2 - 19		
							QC 2 - 2		
							QC 2 - 20		

Plex 5/1/19 10:51 AM Dart.Renwick.Jennife

				QC 2 - 22	
				QC 2 - 23	
				QC 2 - 25	
				QC 2 - 32	
				QC 2 - 33	
				QC 2 - 35	
				QC 2 - 39	
				QC 2 - 4	
				QC 2 - 40	
				QC 2 - 44	
				QC 2 - 45	
				QC 2 - 48	
				QC 2 - 49	
				QC 2 - 50	
				QC 2 - 51	
				QC 2 - 52	
				QC 2 - 57	
				QC 2 - 62	
				QC 2 - 63	
				QC 2 - 8	DAS
				QC 2 - 66	66 2019-06-05
				QC 2 - 64	9-89
				QC 2 - 65	
				QC 2 - 5	
				QC 2 - 71	
140 QC 8	1 pcs	6/7/19	0.00 0.00	QC 8 - 12	
				QC 8 - 14	
				QC 8 - 17	
				QC 8 - 20	
				QC 8 - 25	
				QC 8 - 3	
				QC 8 - 32	
				QC 8 - 33	
				QC 8 - 35	
				QC 8 - 39	
				QC 8 - 4	
				QC 8 - 44	
				QC 8 - 45	
				QC 8 - 49	
				QC 8 - 58	
				QC 8 - 8	
				QC 8 - 9	
				QC 8 - 68	
				QC 8 - 67	GP 19-06-12
				QC 8 - 1 (A)	
				QC 8 - 47	
				QC 8 - 40	
				QC 8 - 52	
				QC 8 - 23	
145 Crosstubes - 2 - B4B	1 pcs	6/7/19	0.00 0.25	Crosstubes - 1 - B4B	
				Crosstubes - 2 - B4B	GP 19-06-18
				Crosstubes - 3 - B4B	
				Crosstubes - 4 - B4B	
150 Crosstubes - 3 - B4B	1 pcs	6/7/19	0.00 0.92	Crosstubes - 1 - B4B	
				Crosstubes - 2 - B4B	
				Crosstubes - 3 - B4B	
				Crosstubes - 4 - B4B	7-4
160 QC 7	1 pcs	6/7/19	0.00 0.00	QC 7 - 10	
				QC 7 - 13	
				QC 7 - 14	
				QC 7 - 15	
				QC 7 - 17	
				QC 7 - 18	
				QC 7 - 19	
				QC 7 - 2	
				QC 7 - 28	
				QC 7 - 3	
				QC 7 - 30	
				QC 7 - 34	
				QC 7 - 36	

				QC 7 - 37	
				QC 7 - 41	
				QC 7 - 47	
				QC 7 - 48	
				QC 7 - 51	
				QC 7 - 58	
				QC 7 - 59	
				QC 7 - 60	
				QC 7 - 9	
				QC 7 - 68	
				QC 7 - 50	
				QC 7 - 67	GP 19-06-20
				QC 7 - 40	
170	Packaging 3-1 - Stock - B4B	1 pcs	6/7/19	0.00 0.00	Packaging 3 - 1 - B4B
					Packaging 3 - 2 - B4B
					Packaging 3 - 3 - B4B
					Packaging 3 - 4 - B4B
					Packaging 3 - 5 - B4B
					Packaging 3 - 6 - B4B
					Packaging 3 - 7 - B4B
					Packaging 3 - 8 - B4B
					Packaging 3 - 9 - B4B
					Packaging 3 - 10 - B4B
					Packaging 3 - 11 - B4B
					Packaging 3 - 12 - B4B
					Packaging 3 - 13 - B4B
					Packaging 3 - 14 - B4B
					Packaging 3 - 15 - B4B
					Packaging 3 - 16 - B4B
					Packaging 3 - 17 - B4B
					Packaging 3 - 18 - B4B
					Packaging 3 - 19 - B4B
					Packaging 3 - 20 - B4B
					Packaging 3 - 21 - B4B
					Packaging 3 - 22 - B4B
					Packaging 3 - 23 - B4B
					Packaging 3 - 24 - B4B
					Packaging 3 - 25 - B4B
					Packaging 3 - 26 - B4B
					Packaging 3 - 27 - B4B
					Packaging 3 - 28 - B4B
					Packaging 3 - 29 - B4B
					Packaging 3 - 30 - B4B
					Packaging 3 - 31 - B4B
					Packaging 3 - 32 - B4B
					Packaging 3 - 33 - B4B
					Packaging 3 - 34 - B4B
					Packaging 3 - 35 - B4B
					Packaging 3 - 36 - B4B
180	QC 21 - SA	1 pcs	6/7/19	0.00 0.00	QC 21 - SA - 21
					QC 21 - SA - 70
					QC 21 - SA - 53

Part Op 100 - 1-Fill tube with sand & install plugs 412-203 on both ends as per Folio FA166 2-Face both sides of tube 3-Turn first Descriptions: taper section on both side as per Folio FA166 4- blend transition lines using belt sander with 60 grit sandpaper

110 - (QC2- Inspect parts off machine FAI/FAIB)

120 - Mori Seiki TL-40 (Mori Seiki CNC Lathe Large) 1-Turn second taper on both sides as per Folio FA166 2- Blend transition lines using belt sander with 60 grit sandpaper. 3- Remove sand and plugs 4-Scribe part # and batch # using vibrating stylus

130 - (QC2- Inspect parts off machine FAI/FAIB)

140 - (QC8- Inspect parts - second check)

145 - GRIND ONLY TRANSITION LINES SMOOTH LONGITUDE WAY.

150 - 1- handfinish X-TUBE INSIDE AND OUT

160 - (QC7-Inspect Chemical Conversion Coat)

170 - (Identify as per dwg & Stock Location: _____) LOCATION : LG014

180 - (QC21- Final Inspection - Work Order Release)

Job BOM

Part / Item	Component Name	Quantity	Operation	Container
D6009-129	Crosstube Material	1 pcs (1 ea)	100-Mori Seiki TL-40 - 1	F123972

Job Allocations				
Operation	Component Part	Required	Inventory	Allocated
100-Mori Seiki TL-40 - 1	D6009-129	1	84	0
Part Specifications				
Specifications could not be found.				

Plex 5/1/19 10:51 AM Dart.Renwick.Jennifer



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
CANADA
TEL.: 1 613 632-5200
Email: sales@dartaero.com
www.dartaerospace.com

Container No: S186343



Part: D412-664-203TRN

Job No: 194375

Serial No/Batch: S186343

Revision: F

Inspector:

Exp Date:

Instructions:

Date: 06/02/19

①

DART AEROSPACE LTD	Work Order:	194375
Description: Crosstube Assembly (412 High Aft)	Part Number:	D412-664-243
Inspection Dwg: D412-664-243 Rev: F		Page 1 of 2


FIRST ARTICLE INSPECTION CHECKLIST

	Inspection Sheet Drawing Dimension	Tolerance	Actual Dimension	Accept	Reject	Method of Inspection	Comments
SIDE A	2.684	+0.005/-0.000	2.689	✓		CNC-04	
	2.748	+0.005/-0.000	2.753	✓		↓	
	2.884	+0.005/-0.000	2.889	✓			
	3.019	+0.005/-0.000	3.024	✓		CNC-05	
	3.163	+0.005/-0.000	3.168	✓		↓	
	3.308	+0.005/-0.000	3.312	✓			
	3.429	+0.005/-0.000	3.434	✓		↓	
	2.990	+0.005/-0.000	2.995	✓		CNC-04	
	2.618	+0.005/-0.000	2.623	✓		"	
	0.200	+/-0.010	.209	✓		CNC-08	
	R0.063	+/-0.010	.063	✓		RG	
	R0.500	+/-0.010	.500	✓		"	
	4.971	+/-0.030	4.969	✓		CNC-08	
SIDE B	2.684	+0.005/-0.000	2.689	✓		CNC-04	
	2.748	+0.005/-0.000	2.752	✓		↓	
	2.884	+0.005/-0.000	2.889	✓			
	3.019	+0.005/-0.000	3.024	✓		CNC-05	
	3.163	+0.005/-0.000	3.168	✓		↓	
	3.308	+0.005/-0.000	3.313	✓			
	3.429	+0.005/-0.000	3.434	✓		↓	
	2.990	+0.005/-0.000	2.994	✓		CNC-04	
	2.618	+0.005/-0.000	2.623	✓		"	
	0.200	+/-0.010	.202	✓		CNC-08	
	R0.063	+/-0.010	.063	✓		RG	
	R0.500	+/-0.010	.500	✓		"	
	4.971	+/-0.030	4.970	✓		CNC-08	
	124.100	+/-0.020	124.100	✓		Tape	

①

DART AEROSPACE LTD	Work Order: 194375
Description: Crosstube Assembly (412 High Aft)	Part Number: D412-664-243
Inspection Dwg: D412-664-243 Rev: F	Page 2 of 2

WALL THICKNESS MEASUREMENT

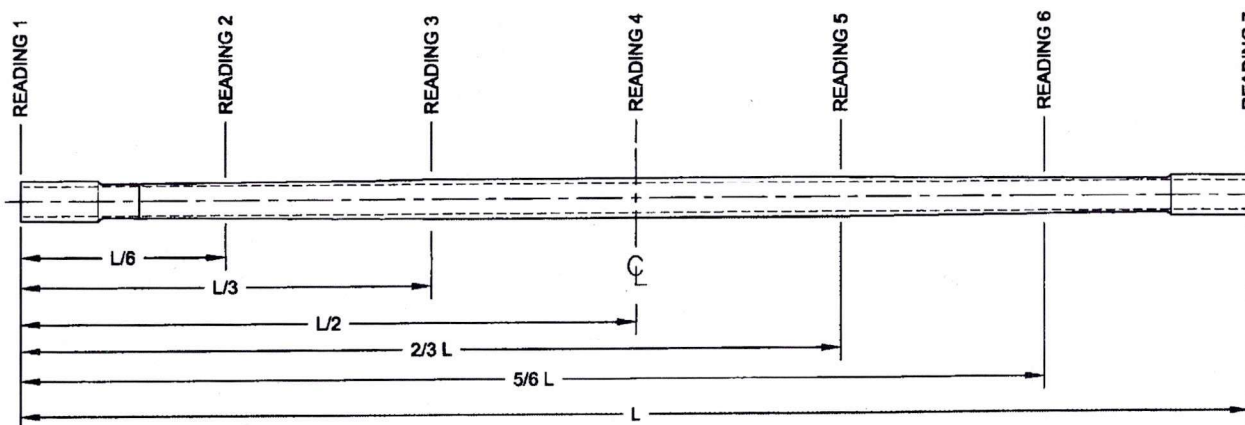

Location	WALL THICKNESS MEASUREMENT (IN)				Deviation Δw (max-min)	TOLERANCE
	w1	w2	w3	w4		
READING 1 L = 0"	.384	.372	.353	.366	.031	0.073"
READING 2 L = 20.683	.332	.311	.287	.303	.045	
READING 3 L = 41.367	.506	.467	.460	.499	.046	
READING 4 L = 62.050	.635	.634	.619	.628	.016	
READING 5 L = 82.733	.513	.529	.454	.435	.094	
READING 6 L = 103.417	.363	.339	.260	.274	.103	
READING 7 L = 124.100	.380	.364	.358	.376	.022	

MEAN: +0.006
Ecc: -0.049

Acceptable per D6009 4/19/6/6

Calibration Result

Actual Block Thickness: 100-750
Sitescan 250 Measured Thickness: 100-750

Measured by: DAS 66	Audited by: DAS 67	Preliminary Approval:
Date: 2019-06-05	Date: 19-06-12	Date:

Rev	Date	Change	Revised by	Approved
A	04.06.16	New Issue (P/O D412-664-203)	KJ/JLM	
B	06.03.09	Dwg Rev updated	KJ/JLM	
C	07.05.08	Tolerance updated for dimension 4.971	KJ/JLM	
D	10.02.02	Dimension 124.100 was 124.09	KJ	
E	12.06.04	Wall thickness form added	KJ	
F	14.06.24	Dwg Rev updated	KJ	

Item	Qty -243	Part Number	Description
1	X	D412-664-243	CROSSTUBE ASSEMBLY (412 HIGH AFT)
2	1	D6009-129	CROSSTUBE
3	2	D3595-063-570	RUBBER CUSHION
4	1	D2896-1	SUPPORT
5	2	D3189-1	CHAFING SHIELD
7	4	MS21920-28	CLAMP
8	2	MS21920-30	CLAMP (OR MS21920-32)
9	A/R	SCOTCH-WELD DP460	EPOXY ADHESIVE, 3M SCOTCH-WELD
10	A/R	PROSEAL 890 B-2	SEALANT

GENERAL NOTES:

- 1) MATERIAL: MANUFACTURED FROM D6009-129
FINISHED LENGTH = 124.100±0.020 (BEFORE BENDING)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
PRIME INSIDE AND OUTSIDE PER DART QSI 005 4.2
MASK UNDERSIDE OF CROSSTUBE AS SHOWN (ZN C8-2, HATCHED AREA)
PAINT OUTSIDE PER DART QSI 005 4.2
AFTER PAINTING, REMOVE MASKING AND APPLY MATTE CLEAR COAT
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED.
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED.
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX.
- 6) IDENTIFICATION: DART P/N "D412-664-243" AND B/N ON INSIDE OF CUFF PER QSI 044 6.4 (VIBRATING STYLUS)
- 7) WEIGHT: 47.0 lbs
- 8) PART IS SYMMETRIC ABOUT CENTERLINE.
- 9) EXTREME CARE MUST BE TAKEN TO PROTECT THE OUTSIDE SURFACE OF THE TUBE. THE OUTSIDE SURFACE MUST BE SMOOTH AND FREE FROM SURFACE DEFECTS SUCH AS SCRATCHES, NICKS, OR DENTS. DEFECTS UP TO 0.005" MAY BE BLENDED OUT LONGITUDINALLY. CIRCUMFERENTIAL GRIND MARKS ARE UNACCEPTABLE. DO NOT GRIND TUBE AFTER SHOT PEEN.

TURNING

- 10) WHEN TRANSITIONING TO STOCK MAT'L, RUN CUTTER OFF PART. BLEND OUT EDGE LONGITUDINALLY. TRANSITION SHOULD BE SMOOTH.

BENDING

- 11) BEND PROGRESSIVELY WITH A MINIMUM OF 8 PASSES. MAXIMUM TUBE FLATTENING DUE TO BENDING IS 7% (BASED ON O.D.) IN LOWER HALF OF R30 BEND AND 8% (BASED ON O.D.) ON REMAINING TUBE.
- 12) LIQUID PENETRANT INSPECT OUTSIDE SURFACE OF CROSSTUBE PER QSI 038. TO BE PERFORMED AFTER FINAL POST-BEND GRINDING. ANY ADDITIONAL GRINDING REQUIRES ANOTHER LPI INSPECTION.

ASSEMBLY

- 13) INSTALL D2896-1 CENTER SUPPORT USING A 0.04" TO 0.07" THICK LAYER OF SCOTCH-WELD DP460 PER QSI 015.
- 14) INSTALL MS21920-30 CLAMPS (OR -32) WITH D3595-063-570 RUBBER CUSHIONS TO SECURE THE D2896-1 SUPPORT ON TOP SIDE OF THE CROSSTUBE. ENSURE CLAMPS ARE ON TOP SIDE OF CROSSTUBE.
- 15) APPLY A THIN COAT OF PROSEAL 890 ON INSIDE CONCAVE SURFACE OF D3189-1 CHAFING SHIELD AND LET CURE PER MANUFACTURER'S INSTRUCTIONS. INSTALL PROSEALED D3189-1 CHAFING SHIELD ONTO CROSSTUBE BY APPLYING A THIN COAT OF PROSEAL 890 ONTO CROSSTUBE. BE SURE TO ELIMINATE ANY AIR GAPS.
- 16) TORQUE CLAMPS ON D2896-1 SUPPORT 80 TO 100 IN-LB. TORQUE CLAMPS ON D3189-1 CHAFING SHIELD 40 TO 50 IN-LB. ENSURE AT LEAST 1.5 THREADS SHOWING IN SAFETY AND THAT NUT HAS NOT BOTTOMED-OUT AFTER TORQUING. PRIOR TO PACKAGING, RE-CHECK TORQUE ON CLAMPS AFTER ADHESIVES HAVE CURED FOR 24 HOURS.



SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE

WORK ORDER


NO. 194335 MJS
19-02-28

RELEASED
2014-05-26

F	NOTES RE-ORDERED, SCOTCH-WELD WAS MAGNOBOND (C8-1), ADD CLAMP RETORQUE (A8-1), REMOVE ABRASION STRIP, ADD INSPECTION WINDOW (C8-1), CHAFING SHIELD NOW 4.38 WIDE (C8-2), ADD 7% CRUSHING (B8-1), CHG BEND HEIGHT TOL TO ±0.25 (C1-3), CHG CUFF TOL (D2-4), CLAMPS FLIPPED TO PREVENT CHAFING (B7-2, B7-3), INCORP. DEO E-2/4	CP	14.04.01
E	REFORMAT/REVISE GENERAL NOTES; REORGANIZED VIEWS AND REFORMATTED DRAWING TO CURRENT STANDARDS; RELOCATED FLAG #6 PER PAR 08-046 (ZN A6-3); ADD TOLERANCE (ZN B6-3, C4-3, C8-3 & C5-3); MOVED TURNING DETAIL & UPDATED TOLERANCE TO SHEET 4.	RF	09.09.30
D	REMOVE D2732-058, CHANGE TO D3595-063-570	PH	07.03.09
C	REMOVE D2856-600-1087, ADD D2732-058 & MAGNOBOND 6398, MS21920-32 WAS MS21920-30	MB	06.10.27
B	ADD HOLES FOR COMPATABILITY WITH BHT/AA SKIDTUBES	PH	05.02.04
A	NEW ISSUE	PH	01.10.17
REV.	DESCRIPTION	BY	DATE
DESIGN	Q	DART AEROSPACE LTD	
DRAWN	Q	HAWKESBURY, ONTARIO, CANADA	
CHECKED	DW	DRAWING NO.	REV. F
MFG. APPR.	DA	D412-664-243	SHEET 1 OF 4
APPROVED	DA	TITLE	SCALE
DE APPR.	DA	CROSSTUBE ASSEMBLY (412 HI AFT)	NTS
DATE	14.04.01	COPYRIGHT © 2001 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

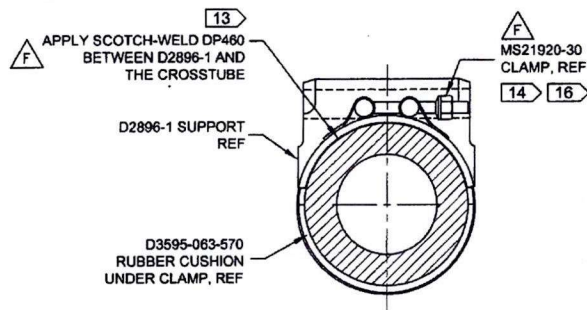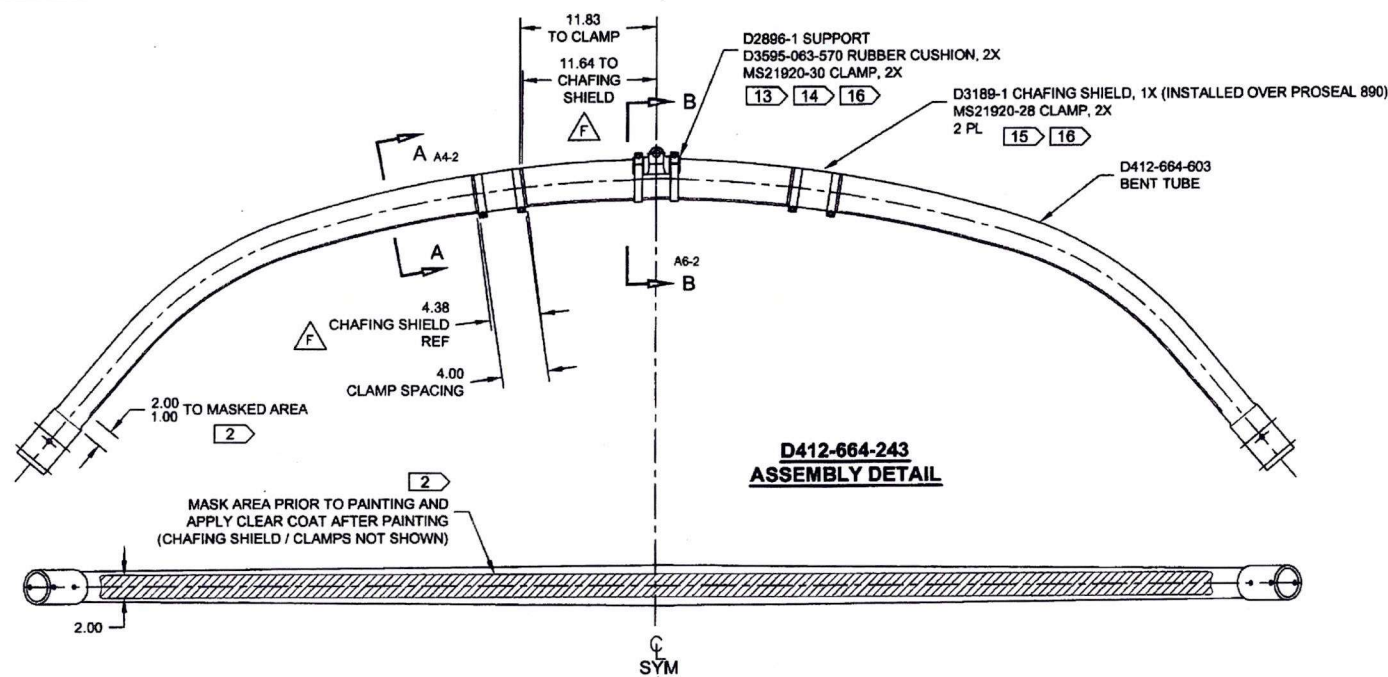

SECTION B-B
SCALE 4X

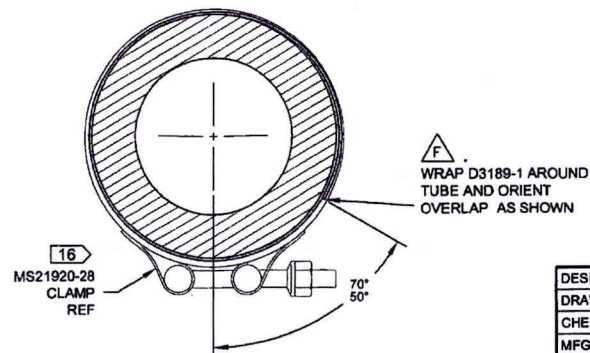


SECTION A-A
SCALE 6X


RELEASED
2014-05-26

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. F
MFG. APPR.		D412-664-243	SHEET 2 OF 4
APPROVED		TITLE	SCALE
DE APPR.		CROSSTUBE ASSEMBLY (412 HI AFT)	NTS
DATE	14.04.01	COPYRIGHT © 2001 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIES OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			


8 7 6 5 4 3 2 1

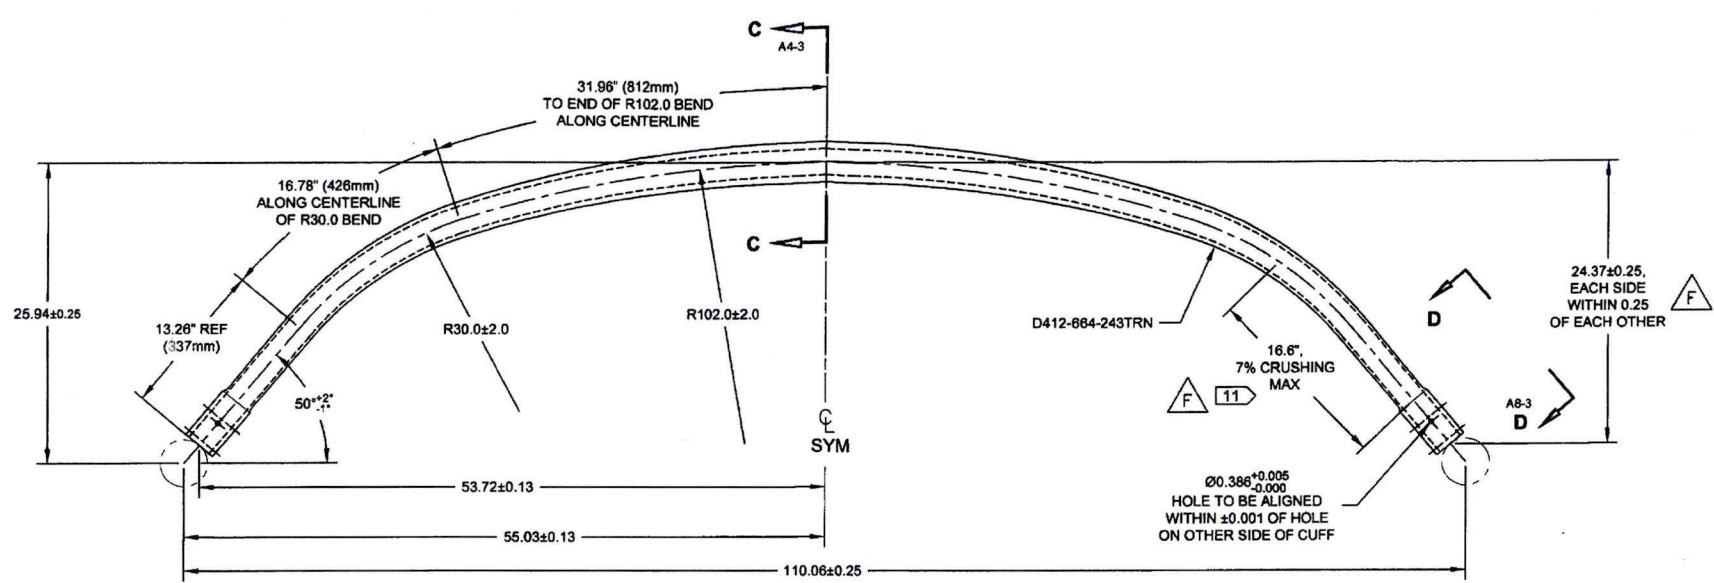

D412-664-603
BENDING AND DRILLING DETAIL

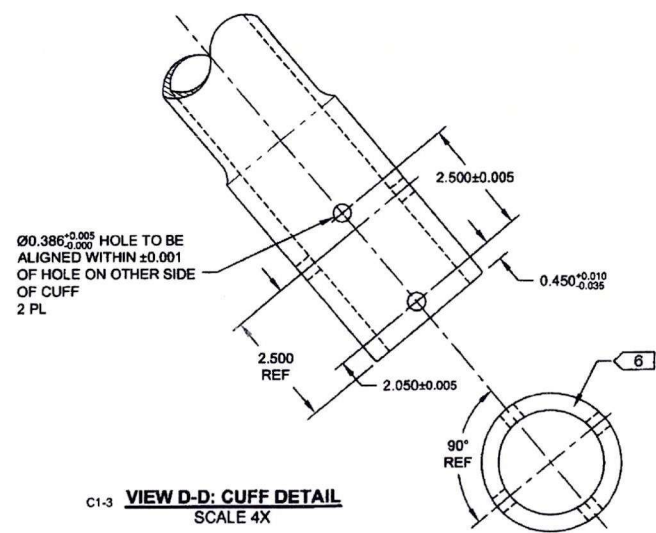

C1-3 **VIEW D-D: CUFF DETAIL**
SCALE 4X




SECTION C-C D5-3
SCALE 4X


RELEASED
2014-05-26

DESIGN	<i>Q</i>	DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED	<i>DW</i>	DRAWING NO.	REV. F
MFG. APPR.	<i>[Signature]</i>	D412-664-243	SHEET 3 OF 4
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	CROSSTUBE ASSEMBLY (412 HI AFT)	NTS
DATE	14.04.01	COPYRIGHT © 2001 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRELIMINARY AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			


8 7 6 5 4 3 2 1

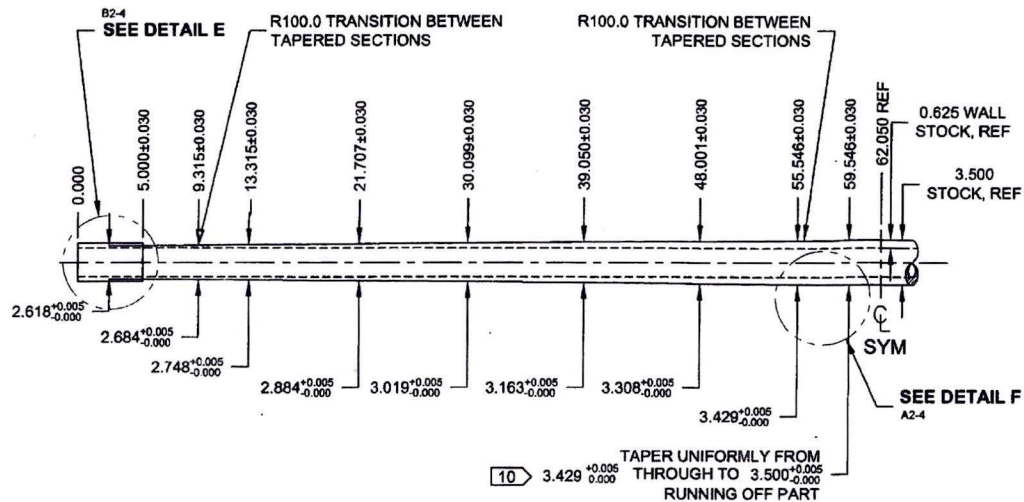


D412-664-243TRN
TURNING DETAIL

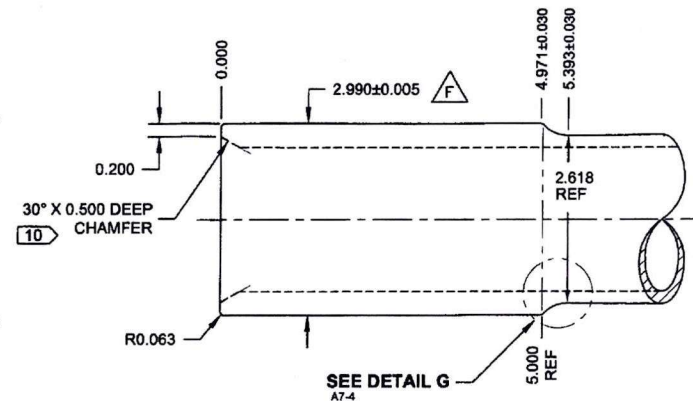

DETAIL E:
CROSSTUBE CUFF
SCALE 6X



DETAIL G:
CUFF TRANSITION
SCALE 10X

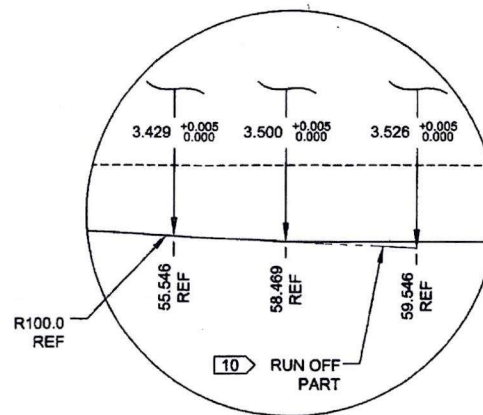

DETAIL F:
TAPER RUN-OFF
NOT TO SCALE

RELEASED
2014-05-26

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. F
MFG. APPR.		D412-664-243	SHEET 4 OF 4
APPROVED		TITLE	SCALE
DE APPR.		CROSSTUBE ASSEMBLY (412 HI AFT)	NTS
DATE	14.04.01	COPYRIGHT © 2001 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	